Digital Column Bathroom Scale

Step-By-Step Assembly Instructions




Znewtech

Step 1:

Remove all packaging materials and lay down all parts on the floor as shown in the picture below

Note:

Make sure these two ends of **stand poles** (shown in the **red circles** below) are the ones that have **SINGLE screw hole** and the single **screw hole** faces down to the floor

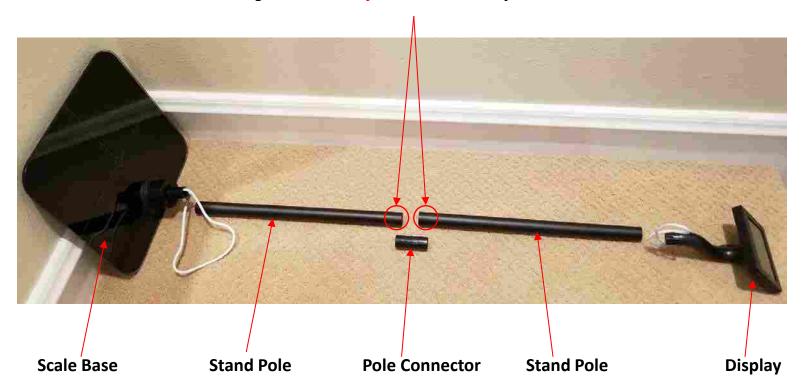

Step 2:

Run the wire from scale base through a stand pole

Tip:Pull the **wire** to straighten it first before inserting the **wire** into the **stand pole**




Step 3:

Align the two screw holes on the stand pole with the two slots on the scale base, and push the stand pole into the scale base firmly.



Note:

Make sure this is the end of **stand pole** that has **SINGLE screw hole** and the single **screw hole** faces down to the floor

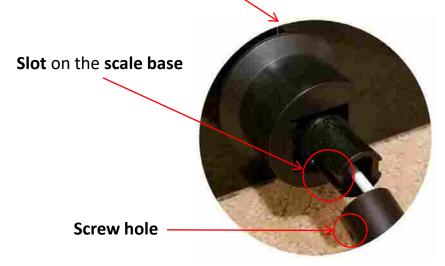

Step 4:

Run wire through the pole connector and insert the pole connector into the stand pole

Tip:Align the **screw hole** on the **stand pole** with the **slot** on the **pole connector** before pushing the **pole connector** into the **stand pole** firmly





Step 5:

Run the wire from scale display through a stand pole


Tip:Pull the **wire** to straighten it first before inserting the **wire** into the **stand pole**



Make sure the single **screw hole** on the **stand pole** faces down to the floor

Step 6:

Connect two wires together

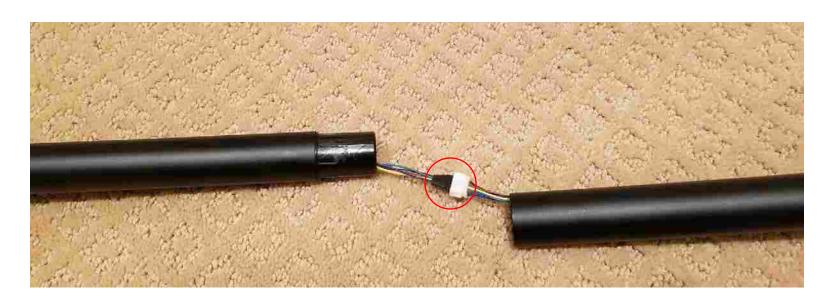

Tip:Flip one **wire connector** direction by 180 degrees if you couldn't connect two **wire connector** together



Step 7:

Connect two stand poles together



Note:Fold the **wire** before inserting it into the **stand pole**Push both **stand poles** into the **pole connector** firmly



Step 8:

Install 4 AAA batteries into the battery compartment on the bottom of scale base, and check if the display screen shows 0.0 lb





Note:

If the **scale screen** doesn't show **0.0 Ib**, please follow the steps below to troubleshoot the problem:

- 1) Uninstall batteries
- 2) Disconnect the pole connector and stand pole
- 3) Disconnect the **wire connectors** and wait for **15 minutes**
- 4) Re-connect the wire connectors and make sure the wires are properly connected
- 5) Install **batteries** and check if the **display screen** shows **0.0 lb**
- 6) If the above steps still doesn't work, please contact us at support@znewtech.com

Step 9:
Hold up the scale to stand-up position and fasten all 6 screws



Note:

Use the scale on a hard, level and even surface—no carpeting. Inconsistent and soft surfaces will cause inaccurate measurements.